

# Quantum Jump Approach to Switching Process of a Josephson Junction Coupled to a Microscopic Two-Level System

Xueda Wen,<sup>1</sup> Yiwen Wang,<sup>1</sup> Ning Dong,<sup>1</sup> Guozhu Sun,<sup>2</sup> Jian Chen,<sup>2</sup> Lin Kang,<sup>2</sup> Weiwei Xu,<sup>2</sup> Peiheng Wu,<sup>2</sup> and Yang Yu<sup>1,\*</sup>

<sup>1</sup>*National Laboratory of Solid State Microstructures and Department of Physics, Nanjing University, Nanjing 210093, China*

<sup>2</sup>*Research Institute of Superconductor Electronics and Department of Electronic Science and Engineering, Nanjing University, Nanjing 210093, People's Republic of China*

With microwave irradiation, the switching current of a Josephson junction coupled to a microscopic two-level system jumps randomly between two discrete states. We modeled the switching process of the coupled system with quantum jump approach that was generally used in quantum optics. The parameters that affect the character of the quantum jumps between macroscopic quantum states are discussed. The results obtained from our theoretical analysis agree well with those of the experiments and provide a clear physical picture for the macroscopic quantum jumps in Josephson junctions coupled with two-level systems. In addition, quantum jumps may serve as a useful tool to investigate the microscopic two-level structures in solid-state systems.

PACS numbers: 74.50.+r, 85.25.Cp

## I. INTRODUCTION

Recent progress on superconducting qubits based upon Josephson Junction (JJ) unambiguously demonstrated the quantum behavior of the macroscopic variables.<sup>1,2,3,4,5,6,7</sup> Moreover, quantum jumps, an interesting quantum phenomenon previously studied in quantum optics,<sup>8,9,10</sup> was experimentally demonstrated for the first time in a junction coupled with a microscopic two-level system (TLS) recently.<sup>11</sup> The JJ-TLS coupling system possesses  $\Lambda$ -type energy level structure and microwave photons are used to generate transitions between quantum states. However, the state of the system is read out by detecting macroscopic quantum tunneling process rather than that by detecting photon emissions in quantum optics. Quantum jumps then manifests itself in the form of jumping randomly between upper branch and lower branch of the switching currents. In the language of quantum measurement theory, the switching currents in the upper branch or lower branch serve as a pointer from which the macroscopic quantum state of the JJ-TLS coupling system can be determined. In this situation the ensemble description of the dynamics of junctions based on the master equation method<sup>12,13,14</sup> fails in describing trajectories of a single quantum system. Since quantum jump approach developed in the 1980s has made great successes in describing fluorescence of single trapped ions<sup>10</sup>, in this paper we generalize the quantum jump approach to the switching process of JJ-TLS coupling system and make a systematic study of the parameters that have effects on the process. The same method has also been used to investigate quantum jumps in Rabi oscillations of a JJ-TLS coupling system.<sup>15</sup> However, in that work the biased current of the junction is fixed at an appropriate value while here it keeps changing during the switching current measurement. Therefore, new mechanisms such as Landau-Zener transitions may involve in the dynamics of the JJ-TLS coupling system.

This article is organized as follows. In Sec. II, we describe the physics of the current-biased Josephson junction briefly and introduce the quantum jump approach for simulating the switching process of a current-biased junction. In Sec. III we generalize the quantum jump approach to the switching process of JJ-TLS coupling system and discuss the parameters that have effects on the process. In Sec. IV we compare our theoretical results with experimental data and make a conclusion in Sec. V.

## II. QUANTUM JUMP APPROACH TO SWITCHING PROCESS OF A CURRENT-BIASED JOSEPHSON JUNCTION

The Hamiltonian of a current-biased Josephson junction as shown in Fig.1(a) reads<sup>16,17</sup>

$$H_{JJ} = \frac{1}{2C}\hat{Q}^2 - \frac{I_0\Phi_0}{2\pi}\cos\hat{\delta} - \frac{I\Phi_0}{2\pi}\hat{\delta}, \quad (1)$$

where  $I_0$  is the critical current of the Josephson junction,  $I$  is the bias current,  $C$  is the junction capacitance,  $\Phi_0 = h/2e$  is the flux quantum,  $\hat{Q}$  denotes the charge operator and  $\hat{\delta}$  represents the gauge invariant phase difference across the junction, which obeys the convectional quantum commutation relation  $[\hat{\delta}, \hat{Q}] = 2ei$ . The states of the current-biased Josephson junction can be controlled through the bias current  $I(t)$  given by

$$I(t) = I_{dc} + \Delta I(t) = I_{dc} + I_{\mu w} \cos \omega t, \quad (2)$$

where the classical bias current is parameterized by a dc component  $I_{dc}$  and an ac component with the magnitude  $I_{\mu w}$  and frequency  $\omega$ . For  $I_{dc} < I_0$ , the effective potential of the system (shown in Fig.1(b)) has a series of metastable wells. At low temperature, the current-biased junction has quantized energy levels, with the two lowest energy states labeled as  $|0\rangle$  and  $|1\rangle$ . Microwaves induce

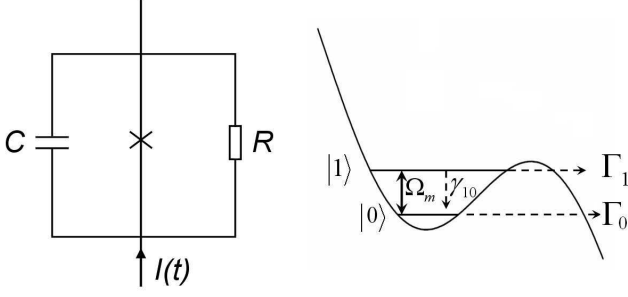


FIG. 1: (a) RCSJ equivalent circuit of a current-biased Josephson tunnel junction. (b) Washboard potential of a current-biased Josephson junction showing various coherent and incoherent processes at low temperature.  $|0\rangle$  and  $|1\rangle$  are ground state and the first excited state which are proposed to do quantum information process as a superconducting phase qubit.

transitions between  $|0\rangle$  and  $|1\rangle$  at a frequency

$$\omega_{10} = \frac{E_1 - E_0}{\hbar} = \omega_p \left(1 - \frac{5}{36} \frac{\hbar \omega_p}{\Delta U}\right), \quad (3)$$

where  $\omega_p(I_{dc}) = 2^{1/4} (2\pi I_0 / \Phi_0 C)^{1/2} (1 - I_{dc}/I_0)^{1/4}$  is the small oscillation frequency at the bottom of the washboard potential and  $\Delta U(I_{dc}) = (2\sqrt{2} I_0 \Phi_0 / 3\pi) (1 - I_{dc}/I_0)^{3/2}$  is the barrier height. It is apparent from Eq.(3) that the energy spacing  $\omega_{10}$  is a function of the bias current  $I_{dc}$ . Therefore, if we ramp  $I_{dc}$  from 0 to  $I_0$ , the barrier  $\Delta U$  is decreasing. At certain  $I_{dc}$  called switching current the system will tunnel out of the potential well. In addition, a microwave with frequency matching the energy level spacing will generate a transition between  $|0\rangle$  and  $|1\rangle$ . As shown in the top panel of Fig.2(b), the main peak of switching current distribution corresponds to the tunneling from the ground state  $|0\rangle$ , and the resonant peak corresponds to the tunneling from the first excited state  $|1\rangle$ . By plotting the frequency of microwave vs. the position of the resonant peak we can obtain the energy spectrum of the junction.

To simulate the switching process of current-biased junction, we firstly write the Hamiltonian of the junction in subspace  $\{|0\rangle, |1\rangle\}$

$$H_{JJ} = \hbar \begin{pmatrix} 0 & \Omega_m \cos \omega t \\ \Omega_m \cos \omega t & \omega_{10}(I_{dc}) \end{pmatrix}, \quad (4)$$

where  $\Omega_m = I_{\mu w} \sqrt{1/2\hbar\omega_{10}C}$  is Rabi frequency. Considering the dissipative effect of environment, the time evolution of the system can be described by the non-Hermitian effective Hamiltonian

$$H_{eff} = H_{qb} - \frac{i\hbar}{2}(\gamma_{10} + \Gamma_1)|1\rangle\langle 1| - \frac{i\hbar}{2}\Gamma_0|0\rangle\langle 0|, \quad (5)$$

where  $\gamma_{10}$  is the energy relaxation rate from  $|1\rangle$  to  $|0\rangle$ , and  $\Gamma_i$  is the tunneling rate from state  $|i\rangle$  ( $i = 0, 1$ ) out of the potential (Fig. 1(b)). It is noticed that both  $\gamma_{10}$  and

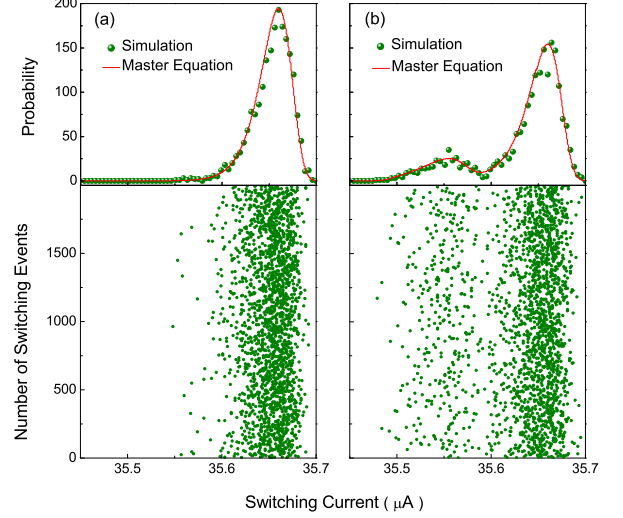


FIG. 2: (color online) Simulated switching currents (lower panel) of a junction obtained by quantum jump approach (a) without microwave and, (b) with microwave respectively. The parameters used for simulations are:  $I_0 = 35.9\mu\text{A}$ ,  $C = 4\text{pF}$ ,  $\omega/2\pi = 9.02\text{GHz}$ , and  $\gamma_{10} = 0.6\mu\text{s}^{-1}$ . The ramping rate is  $dI_{dc}/dt = 4.5 \times 10^{-3}\mu\text{A/s}$ . By making the histogram of the switching currents we obtained the switching current distribution, shown as the symbols in the top panel. The red lines are ensemble results obtained using the master equations.

$\Gamma_i$  are functions of the bias current  $I_{dc}$ . At temperature  $T$ , the relaxation rate  $\gamma_{10}$  is given by<sup>13</sup>

$$\gamma_{10} = \frac{\omega_{10}}{2\pi} \frac{R_Q}{R} [1 + \coth(\frac{\hbar\omega_{10}}{2k_B T})] \times |\langle 0|\hat{\delta}|1\rangle|^2, \quad (6)$$

where  $R_Q \equiv h/4e^2 \simeq 6.45k\Omega$  is the natural quantum unit of resistance and  $R$  is the shunting resistance in RCSJ model (Fig. 1(a)). The tunneling rate  $\Gamma_i$  from the state  $|i\rangle$  can be obtained with the WKB method

$$\Gamma_i = \frac{1}{T(E_i)} \exp(-\frac{2S_f(E_i)}{\hbar}), \quad (7)$$

where  $T(E_i)$  is the classical period of motion and  $S_f(E_i)$  is the action across the classically forbidden region.

Then the quantum jump approach for simulating the switching process of junctions can be summarized as follows:

(i) At  $t = 0$ , initializing the junction in the ground state:  $|\Psi(t=0)\rangle = |0\rangle$ .

(ii) For  $I_{dc}(t + \Delta t) = I_{dc}(t) + (dI/dt)\Delta t$ , calculate the corresponding energy spacing and various transition rates according to Eq.(3-7).

(iii) Determine whether the system evolves according to the schrödinger equation, or makes a 'jump'.<sup>15</sup>

(a) If a quantum tunneling escape happens, register the switching current  $I_s = I_{dc}(t)$ , and then turn to step (v).

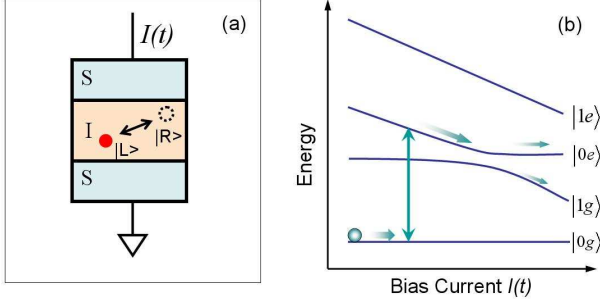


FIG. 3: (a) (Color online) Schematic of a TLS locating inside the Josephson tunnel barrier. Some particles can tunnel between two lattice positions with different wavefunctions  $|L\rangle$  and  $|R\rangle$ , respectively. (b) Illustration of transition from  $|g\rangle$  to  $|e\rangle$  for the TLS. Assuming the system is initially in state  $|0g\rangle$ , at a certain biased current  $I_{dc}$ , the microwave is resonant with  $\omega_{10}$  and a transition from  $|0g\rangle$  to  $|1g\rangle$  happens. Furthermore, when the biased current is ramped through the avoided energy level crossing, the Landau-Zener transition may lead to a finite occupation probability in state  $|0e\rangle$ .

(b) If a relaxation event happens, then the system jumps to the ground state  $|0\rangle$ .

(c) If no jumps happen, the system evolves under the influence of the non-Hermitian form.<sup>15</sup>

(iv) For the case (b) and (c), repeat from step (ii).

(v) Repeat to obtain the switching current  $I_s$ .

(vi) Average switching current  $I_s$  over many simulation runs.

The numerical results obtained with quantum jump approach are shown in Fig.2. The parameters we used in the simulation are from experiments.<sup>11</sup> In addition, we calculate the switching current distribution with the master equation method. The agreement between the quantum jump approach and the master equation indicates that quantum jump approach is valid to model the switching process of junction. Furthermore, as discussed in Sec. III, quantum jump approach is more powerful than master equation method when stochastic characteristics of a single quantum system play an important role.

### III. QUANTUM JUMP APPROACH TO SWITCHING PROCESS OF A JJ-TLS COUPLING SYSTEM

Firstly we give a brief description of the physics of JJ-TLS coupling system. TLSs are extensively observed in superconducting phase<sup>18,19,20</sup>, charge<sup>21</sup> and flux<sup>22</sup> qubits recently. A TLS is understood to be a particle or a small group of particles that tunnels between two lattice configurations, with different wave functions  $|L\rangle$  and  $|R\rangle$  corresponding to different junction critical current  $I_{0L}$  and  $I_{0R}$ , respectively (Fig. 3(a)). The interaction Hamilto-

nian between the junction and TLS can be written as:<sup>18</sup>

$$H_{int} = -\frac{\Phi_0 I_{0R}}{2\pi} \cos \delta \otimes |R\rangle\langle R| - \frac{\Phi_0 I_{0L}}{2\pi} \cos \delta \otimes |L\rangle\langle L|. \quad (8)$$

For convenience, we transfer to the energy eigenstate basis of TLS with  $|g\rangle$  and  $|e\rangle$  being the ground state and the excited state, respectively. Then the total Hamiltonian of the JJ-TLS in the basis  $\{|0g\rangle, |1g\rangle, |0e\rangle, |1e\rangle\}$  is given by:<sup>15,23</sup>

$$H = \hbar \begin{pmatrix} 0 & \Omega_m \cos \omega t & 0 & 0 \\ \Omega_m \cos \omega t & \omega_{10}(I_{dc}) & \Omega_c & 0 \\ 0 & \Omega_c & \omega_{TLS} & \Omega_m \cos \omega t \\ 0 & 0 & \Omega_m \cos \omega t & \omega_{10}(I_{dc}) + \omega_{TLS} \end{pmatrix}, \quad (9)$$

where  $\omega_{TLS}$  is the energy frequency of the TLS, and  $\Omega_c$  is the coupling strength between Josephson junction and TLS. In experiments, the coupling strength  $\Omega_c$  can be characterized in spectroscopic measurements and usually lies from 20MHz to 200MHz.<sup>11,18,19,20,21,22</sup> The time evolution of the JJ-TLS coupling system under the dissipative effect of environments can be described by the effective Hamiltonian

$$H_{eff} = H - \frac{i\hbar}{2} \Gamma_{0g} |0g\rangle\langle 0g| - \frac{i\hbar}{2} (\gamma_{10} + \Gamma_{1g}) |1g\rangle\langle 1g| - \frac{i\hbar}{2} \Gamma_{0e} |0e\rangle\langle 0e| - \frac{i\hbar}{2} (\gamma_{10} + \Gamma_{1e}) |1e\rangle\langle 1e|, \quad (10)$$

where  $\Gamma_i$  is the tunneling rate from state  $|i\rangle$ . We emphasize that in the asymmetric double well model of TLS, the energy basis of TLS is approximated to the position basis. In this approximation, states  $|g\rangle$  and  $|e\rangle$  correspond to different critical currents. Therefore, the tunneling rates from different states are different. With no loss of generality, suppose the state  $|e\rangle$  corresponds to the smaller critical current. Then the procedure for simulating the switching process of the JJ-TLS coupling system can be summarized as follows:

(i) Initializing the system in state  $|0g\rangle$  for  $flag = 0$ , or in state  $|0e\rangle$  for  $flag = 1$ , where  $flag$  is a marker.

(ii) For  $I_{dc}(t + \Delta t) = I_{dc}(t) + (dI/dt)\Delta t$ , calculate the corresponding energy spacing  $\omega_{10}(I_{dc})$  and various transition rates.

(iii) Determine whether the system evolves according to the Schrödinger equation, or makes a 'jump'.

(a) If a quantum tunneling event happens, register the switching current  $I_s = I_{dc}(t)$ . Furthermore, if the system tunnels from  $|0g\rangle$  or  $|1g\rangle$ , set  $flag = 0$ ; else if the system tunnels from  $|0e\rangle$  or  $|1e\rangle$ , set  $flag = 1$ ; and then turn to step (v).

(b) If a relaxation event happens, then the system jumps to the corresponding ground state  $|0g\rangle$  or  $|0e\rangle$ , i.e., the system jumps from  $|1g\rangle$  to  $|0g\rangle$ , or from  $|1e\rangle$  to  $|0e\rangle$ .

(c) If no jumps happen, the system evolves under the influence of the non-Hermitian form.

(iv) For the case (b) and (c), repeat from step (ii).

(v) Repeat to obtain the switching current  $I_s$ .

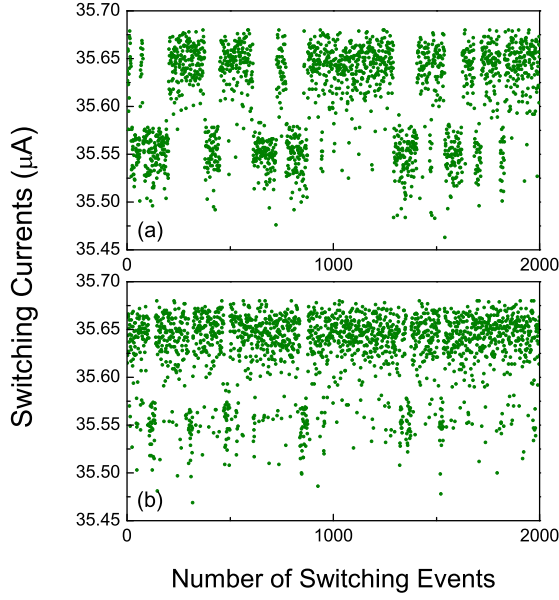


FIG. 4: Simulated trajectories of switching current of JJ-TLS coupling system under different microwave amplitude. The parameters used in the simulations are:  $\omega/2\pi=9.02\text{GHz}$ ,  $\omega_{TLS}/2\pi = 8.7\text{GHz}$ ,  $\Omega_c/2\pi = 200\text{MHz}$ ,  $\gamma_{10}=0.6\mu\text{s}^{-1}$ ,  $dI_{dc}/dt = 4.5 \times 10^3 \mu\text{A/s}$  and (a)  $\Omega_m=2\text{MHz}$ , (b)  $\Omega_m=10\text{MHz}$ . With the microwave amplitude increasing, the jumps between upper branch and lower branch become more frequent, resulting in a shorter lifetime in each branch.

The simulation results are shown in Fig. 4. It is apparent that the switching current jumps between upper branch and lower branch randomly, which is the major characteristic of macroscopic quantum jumps observed in experiments.<sup>11</sup> In addition, it is found that the jumps become more frequent with the microwave amplitude increasing (Fig.4). The underlying physics can be understood as follows. The jumps between upper branch and lower branch of the switching current are fulfilled through the coupling between state  $|1g\rangle$  and  $|0e\rangle$ . With increasing the microwave amplitude, the system initialized in  $|0g\rangle$  has a larger transition rate to  $|1g\rangle$  in the expression

$$\Gamma = \frac{\Omega_m^2 \gamma}{2(\Delta^2 + \gamma^2)}, \quad (11)$$

where  $\gamma = (\gamma_{10} + \Gamma_{0g} + \Gamma_{1g})/2$  and  $\Delta = \omega_{10} - \omega$ . Therefore, it is much easier for the system to jump to state  $|0e\rangle$ , i.e., jump from the upper branch to the lower branch, and vice versa. It is easier to understand for the extreme case  $\Omega_m = 0$ . Then the system has no probability to occupy state  $|1g\rangle$ , thus no probability to transfer to  $|0e\rangle$ .

Furthermore, it is noticed that the transition process from  $|1g\rangle$  to  $|0e\rangle$  is actually a Landau-Zener transition as illustrated in Fig. 3(b). Disregarding all decay terms, the asymptotic probability of a Landau-Zener transition

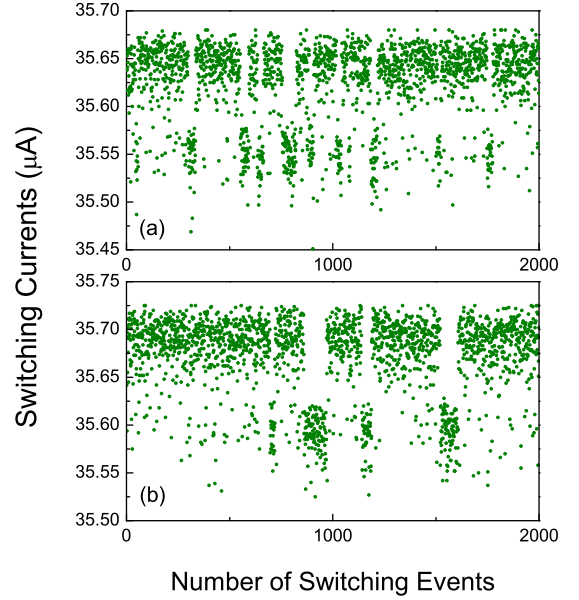


FIG. 5: Simulated trajectories of switching current of JJ-TLS coupling system under different bias current ramping rates. The parameters used in the simulations are:  $\omega/2\pi=9.02\text{GHz}$ ,  $\gamma_{10}=0.6\mu\text{s}^{-1}$ ,  $\Omega_m=10\text{MHz}$  and (a)  $dI_{dc}/dt = 4.5 \times 10^3 \mu\text{A/s}$ , (b)  $dI_{dc}/dt = 8.0 \times 10^3 \mu\text{A/s}$ . With the ramping rate increasing, the jumps between upper branch and lower branch become less frequent, resulting in a longer lifetime in each branch. In addition, the switching current in both branches becomes higher for the larger ramping rate.

is given by<sup>24,25</sup>

$$P_{LZ} = \exp(-2\pi \frac{\hbar \Omega_c^2}{v}), \quad (12)$$

where  $2\hbar\Omega_c$  is the magnitude of the energy splitting, and  $v \equiv d\varepsilon/dt$  denotes the variation rate of the energy spacing for noninteracting levels. Notice that  $v \equiv (d\varepsilon/dI_{dc})(dI_{dc}/dt)$ , where  $d\varepsilon/dI_{dc}$  is determined by the intrinsic parameters of the junction and  $dI_{dc}/dt$  is determined by the ramping rate. It can be easily inferred from Eq.(12) that as the ramping rate increased, the transition rate between  $|1g\rangle$  and  $|0e\rangle$  becomes smaller. Therefore, the jumps between upper branch and lower branch of the switching currents become less frequent and the lifetime for each branch is longer. To support this argument, we simulate the trajectories of the switching currents for different ramping rates. As shown in Fig. 5, with the ramping rate increasing, the jumps between different branches become less frequent, as expected from our theoretical analysis.

#### IV. EXPERIMENTS

We have compared the results of our theoretical analysis with the experimental data. The sample used in our

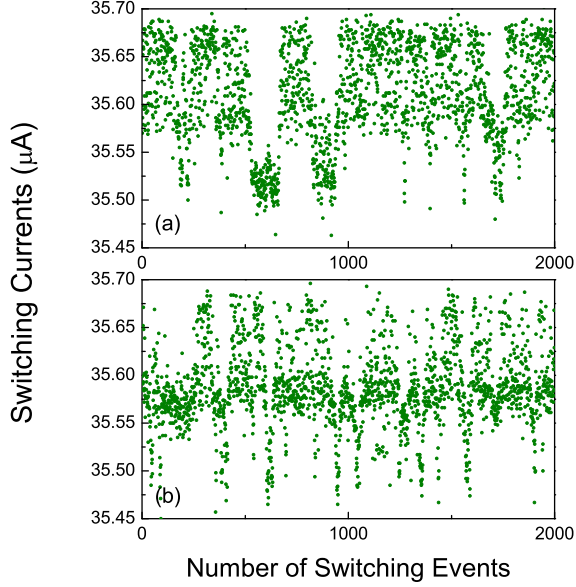


FIG. 6: Experimental trajectories of switching current of JJ-TLS coupling system under different microwave power with (a) -7.2dBm and (b) -5.8dBm. The ramping rate is  $dI_{dc}/dt = 4.5 \times 10^3 \mu\text{A/s}$ . As increasing the microwave power, the jumps become much more frequent.

experiments was a  $10\mu\text{m} \times 10\mu\text{m}$  Nb/ $\text{AlO}_x$ /Nb Josephson junction. The junction parameters are  $I_0 \approx 36\mu\text{A}$  and  $C \approx 4\text{pF}$ , respectively. The device was thermally anchored to the mixing chamber of a dilution refrigerator with a base temperature of about 18mK. Additional three-layer mu-metal surrounding the dewar was used to shield the magnetic field. All electrical leads that connect the junction to room temperature electronics were carefully filtered by resistor-capacitor (RC) filters and copper powder filters. The center conductor of an open-ended coaxial cable was placed above the junction for application of microwave. This arrangement resulted in  $>110\text{dB}$  attenuation between the end of the coaxial cable and the junction. A saw-tooth bias current was applied with a repetition rate of  $30\text{Hz} \sim 300\text{Hz}$ .<sup>11,26</sup> The junction voltage was amplified by a differential amplifier and the switching current was recorded when a voltage greater than the threshold was first detected during every ramp.

In the spectroscopy measurement of the junction, an avoided crossing caused by the coupling between junction and TLS was observed at  $\omega/2\pi = 8.7\text{GHz}$  with an energy splitting  $2\Omega_c/2\pi = 400\text{MHz}$ .<sup>11</sup> When a microwave field with  $\omega/2\pi = 9.02\text{GHz}$  was applied, the coupling between junction and TLS was turned on. In this case the macroscopic quantum jumps between upper branch and lower branch of the switching current were observed. To investigate the effect of microwave power as discussed in Sec. III, we fixed the microwave frequency at  $\omega = 9.02\text{GHz}$  and the ramping rate at  $dI_{dc}/dt = 4.5 \times 10^3 \mu\text{A/s}$ . The

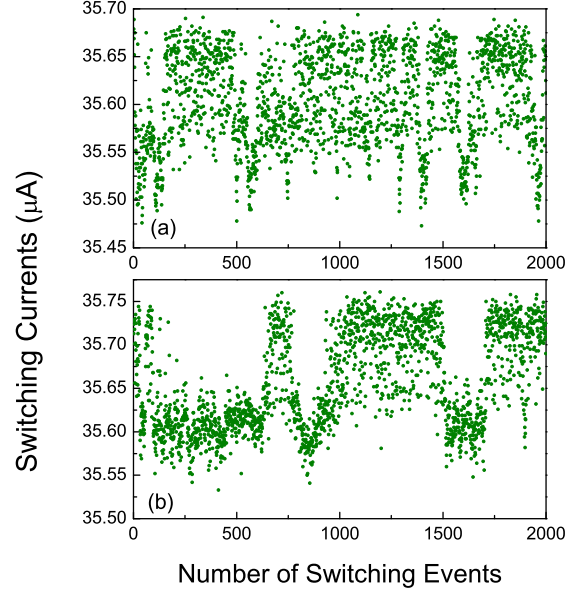


FIG. 7: Experimental trajectories of switching current of JJ-TLS coupling system under different ramping frequency. The microwave power is -6.6dBm and the ramping rates are (a)  $dI_{dc}/dt = 4.5 \times 10^3 \mu\text{A/s}$  and (b)  $dI_{dc}/dt = 8.0 \times 10^3 \mu\text{A/s}$ , respectively. With the ramping rate increasing, the jumps between different branches become less frequent.

microwave power was adjusted from -20dBm to -3dBm. As shown in Fig. 6, with the microwave power increasing, quantum jumps between different branches become much frequent. Similarly, to investigate the effect of ramping rate, we adjusted the ramping rate  $dI_{dc}/dt$  from  $2.0 \times 10^3 \mu\text{A/s}$  to  $16.0 \times 10^3 \mu\text{A/s}$  while keeping other parameters fixed. As expected, the increasing of ramping rate results in less frequent jumps between upper branch and lower branch of the switching current (Fig. 7). The agreement between our simulated results and the experimental data confirmed the validity of the quantum jump approach.

## V. CONCLUSION

We have used the quantum jump approach to simulate the switching process of the JJ-TLS coupling system. The mechanism that dominates the quantum jumps phenomenon was discussed. In addition, we investigated the parameters that have effects on the behavior of quantum jumps. It is found that a higher microwave power or a smaller ramping rate can make the quantum jumps happen more frequently, which has significance in controlling the state of TLS. Furthermore, our theoretical results agree with the experimental data, indicating the validity of our approach. The model and method we used here can be easily generalized to other solid-state systems such as flux and charge qubits, quantum dots, trapped ions and so on.



## VI. ACKNOWLEDGMENTS

This work was partially supported by the NSFC (under Contracts No. 10674062 and No. 10725415), the

State Key Program for Basic Research of China (under Contract No. 2006CB921801), and the Doctoral Funds of the Ministry of Education of the People's Republic of China (under Contract No. 20060284022).

---

\* Electronic address: yuyang@nju.edu.cn

- <sup>1</sup> Y. Makhlin, G. Schön, and A. Shnirman, *Rev. Mod. Phys.* **73**, 357 (2001).
- <sup>2</sup> Y. Yu, S. Y. Han, X. Chu, S. I. Chu, and Z. Wang, *Science* **296**, 889 (2002).
- <sup>3</sup> J. M. Martinis, S. Nam, J. Aumentado, and C. Urbina, *Phys. Rev. Lett.* **89**, 117901 (2002); N. Katz, M. Ansmann, Radoslaw C. Bialczak, Erik Lucero, R. McDermott, Matthew Neeley, Matthias Steffen, E. M. Weig, A. N. Cleland, John M. Martinis, and A. N. Korotkov, *Science* **312**, 1498 (2006); M. Hofheinz, H. Wang, M. Ansmann, R. C. Bialczak, E. Lucero, M. Neeley, A. D. OConnell, D. Sank, J. Wenner, John M. Martinis and A. N. Cleland, *Nature* **459**, 546 (2009).
- <sup>4</sup> T. Yamamoto, Y. A. Pashkin, O. Astafiev, Y. Nakamura, and J. S. Tsai, *Nature* **425**, 941 (2003); A. O. Niskanen, K. Harrabi, F. Yoshihara, Y. Nakamura, S. Lloyd, and J. S. Tsai, *Science* **316**, 723 (2007).
- <sup>5</sup> I. Chiorescu, P. Bertet, K. Semba, Y. Nakamura, C. J. P. M. Harmans, J. E. Mooij, *Nature* **431**, 159 (2004).
- <sup>6</sup> W. D. Oliver, Y. Yu, J. C. Lee, K. K. Berggren, L. S. Levitov, and T. P. Orlando, *Science* **310**, 1653 (2005); D. M. Berns, M. S. Rudner, S. O. Valenzuela, K. K. Berggren, W. D. Oliver, L. S. Levitov, and T. P. Orlando, *Nature* **455**, 51 (2008).
- <sup>7</sup> D. I. Schuster, A. A. Houck, J. A. Schreier, A. Wallraff, J. M. Gambetta, A. Blais, L. Frunzio, J. Majer, B. Johnson, M. H. Devoret, S. M. Girvin and R. J. Schoelkopf, *Nature* **445**, 515 (2007); L. S. Bishop, J. M. Chow, J. Koch, A. A. Houck, M. H. Devoret, E. Thuneberg, S. M. Girvin, and R. J. Schoelkopf, *Nat. Phys.* **5**, 105 (2008); L. DiCarlo, J. M. Chow, J. M. Gambetta, L. S. Bishop, B. R. Johnson, D. I. Schuster, J. Majer, A. Blais, L. Frunzio, S. M. Girvin and R. J. Schoelkopf, *Nature* **460**, 240 (2009).
- <sup>8</sup> M. O. Scully and M. S. Zubairy, *Quantum Optics* (Cambridge, 1997).
- <sup>9</sup> M. Orszag, *Quantum Optics: Including Noise Reduction, Trapped Ions, Quantum Trajectories, and Decoherence* (Springer-Verlag Berlin Heidelberg, 2000).
- <sup>10</sup> For a review, see: M. B. Plenio and P. L. Knight, *Rev. Mod. Phys.* **70**, 101 (1998).
- <sup>11</sup> Y. Yu, S.-L. Zhu, G. Sun, X. Wen, N. Dong, J. Chen, P. Wu, and S. Han, *Phys. Rev. Lett.* **101**, 157001 (2008).
- <sup>12</sup> K. S. Chow, D. A. Browne, and V. Ambegaokar, *Phys. Rev. B* **37**, 1624 (1988).
- <sup>13</sup> P. Kopietz and S. Chakravarty, *Phys. Rev. B* **38**, 97 (1988).
- <sup>14</sup> P. Silvestrini, Yu. N. Ovchinnikov, and R. Cristiano, *Phys. Rev. B* **41**, 7341 (1990).
- <sup>15</sup> Xueda Wen, Shi-Liang Zhu and Yang Yu, arXiv:0906.4390.
- <sup>16</sup> J. M. Martinis, M. H. Devoret, and J. Clarke, *Phys. Rev. B* **35**, 4682 (1987).
- <sup>17</sup> J. M. Martinis, S. Nam, J. Aumentado, and K. M. Lang, *Phys. Rev. B* **67**, 094510 (2003).
- <sup>18</sup> R. W. Simmonds, K. M. Lang, D. A. Hite, S. Nam, D. P. Pappas, and John. M. Martinis, *Phys. Rev. Lett.* **93**, 077003 (2004);
- <sup>19</sup> K. B. Cooper, Matthias Steffen, R. McDermott, R. W. Simmonds, Seongshik Oh, D. A. Hite, D. P. Pappas, and John M. Martinis, *Phys. Rev. Lett.* **93**, 180401 (2004);
- <sup>20</sup> John M. Martinis, K. B. Cooper, R. McDermott, Matthias Steffen, Markus Ansmann, K. D. Osborn, K. Cicak, Seongshik Oh, D. P. Pappas, R. W. Simmonds, and Clare C. Yu, *Phys. Rev. Lett.* **95**, 210503 (2005).
- <sup>21</sup> Z. Kim, V. Zaretsky, Y. Yoon, J. F. Schneiderman, M. D. Shaw, P. M. Echternach, F. C. Wellstood, and B. S. Palmer, *Phys. Rev. B* **78**, 144506 (2008).
- <sup>22</sup> A. Lupascu, P. Bertet, E.F.C. Driessen, C.J.P.M. Harmans, J.E. Mooij, arXiv:0810.0590 (unpublished).
- <sup>23</sup> L.-C. Ku and C. C. Yu, *Phys. Rev. B* **72**, 024526 (2005).
- <sup>24</sup> L. Landau, *Phys. Z. Sowjetunion* **2**, 46 (1932).
- <sup>25</sup> C. Zener, *Proc. R. Soc. A* **137**, 696 (1932).
- <sup>26</sup> Ning Dong, Guozhu Sun, Yiwen Wang, Junyu Cao, Yang Yu, Jian Chen, LinKang, Weiwei Xu, Siyuan Han, and Peiheng Wu, *Supercond. Sci. Technol.* **20**, S441 (2007).